


Specification of Front End Loader (mm)

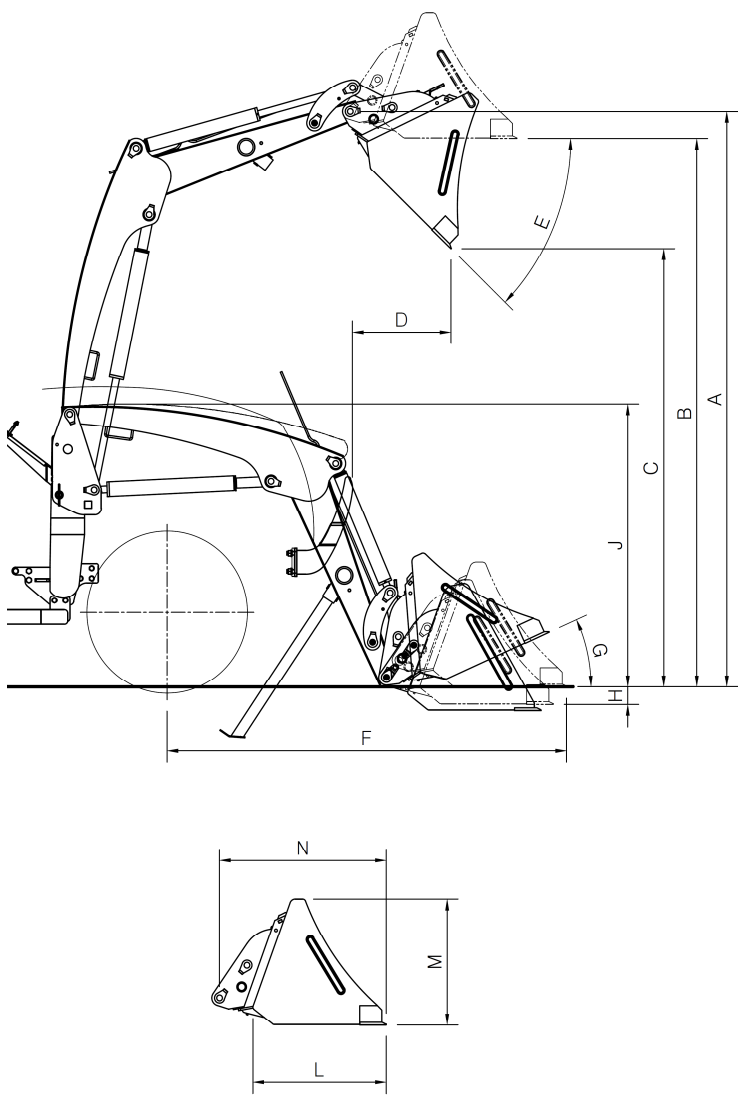

MODEL	BL00			BL05		BL15				BL25			BL45		
	BL00	BL00SL	BL00SL-4P (4in1)	BL05	BL05SL- QBDE	BL15	BL15-QB	BL15SL- QBDE	BL15SL- QB4P (4in1)	BL25RB	BL25RSL- QB2	BL25RSL- QB4P (4in1)	BL45	BL45SL- QBDE	BL45SL- QB4P (4in1)
Horse Power (hp)	21 ~ 28			30		35 ~ 45				35 ~ 60			74 ~ 78		
A. Maximum Lift Height (mm)	1,824	2,161	2,161	2,198	2,350	2,565	2,565	2,523	2,523	2,637	2,593	2,593	3,200	3,003	3,003
B. Clearance with Attachment Level (mm)	1,692	1,999	1,958	2,065	2,096	2,430	2,430	2,300	2,286	2,427	2,366	2,356	2,932	2,638	2,664
C. Clearance with Attachment Dumped (mm)	1,371	1,576	1,563	1,796	1,614	1,915	1,915	1,701	1,707	1,962	1,769	1,783	2,410	2,127	2,151
D. Reach at Maximum Height (mm)	770	268	302	745	332	55	55	207	262	664	265	335	320	290	382
E. Maximum Dump Angle (°)	44	73	66	34	62	44	44	69	64	42	68	62	54	72	67
F. Reach with Attachment on Ground (mm)	1,391	1,458	1,490	1,510	1,840	1,900	1,900	1,965	1,972	1,777	1,821	1,823	1,930	1,943	1,902
G. Attachment Rollback Angle (°)	24	38	45	25	50	24	24	37	42	26	38	43	32	46	51
H. Digging Depth Below Grade (mm)	78	66	106	119	277	90	90	235	249	94	169	179	120	151	124
J. Overall Height IN Carry Position (mm)	1,177	1,261	1,289	1,201	1,345	1,265	1,265	1,429	1,438	1,331	1,459	1,466	1,604	1,858	1,858
L. Depth of Attachment (mm)	466	455	532	466	523	600	600	602	641	602	602	546	609	609	641
M. Height of Attachment (mm)	431	430	555	430	487	560	560	560	657	560	560	657	604	604	657
N. Depth of Attachment (to pivot pin) (mm)	518	560	563	518	699	790	790	794	792	770	794	717	769	801	781
Lift Capacity to Full Height @ Pivot Pins (Kgf)	320	320	320	640	640	948	948	948	948	948	948	948	1,190	1,190	1,190
Breakout Force @ Ground Level, pivot pin (Kgf)	502	502	502	1,250	1,250	1,602	1,602	1,602	1,602	1,602	1,602	1,602	1,936	1,936	1,936
Relief Valve Setting (Loader Control Valve) (Kgf/cm²)	170	170	170	175	175	175	175	175	175						
Attachment used for specification															
Bucket (struck) (m³)	0.13	0.11	0.12	0.15	0.16	0.23	0.23	0.23	0.23	0.26	0.26	0.25	0.32	0.32	0.28
(Heaped) (m³)	0.15	0.14	0.16	0.18	0.19	0.29	0.29	0.29	0.3	0.32	0.32	0.32	0.39	0.39	0.36
BUCKET Type	Pin on	Pin on	Pin on	Pin on	Euro Hitch	Skid Steer	Skid steer	Euro Hitch	Euro Hitch	Euro Hitch	Euro Hitch	Euro Hitch	Skid steer	Euro Hitch	Euro Hitch
Remark					Cable joystick			Cable joystick							